


CONNECT TO THE FUTURE of PORTABLE POWER.

20KW PROPANE GENERATOR

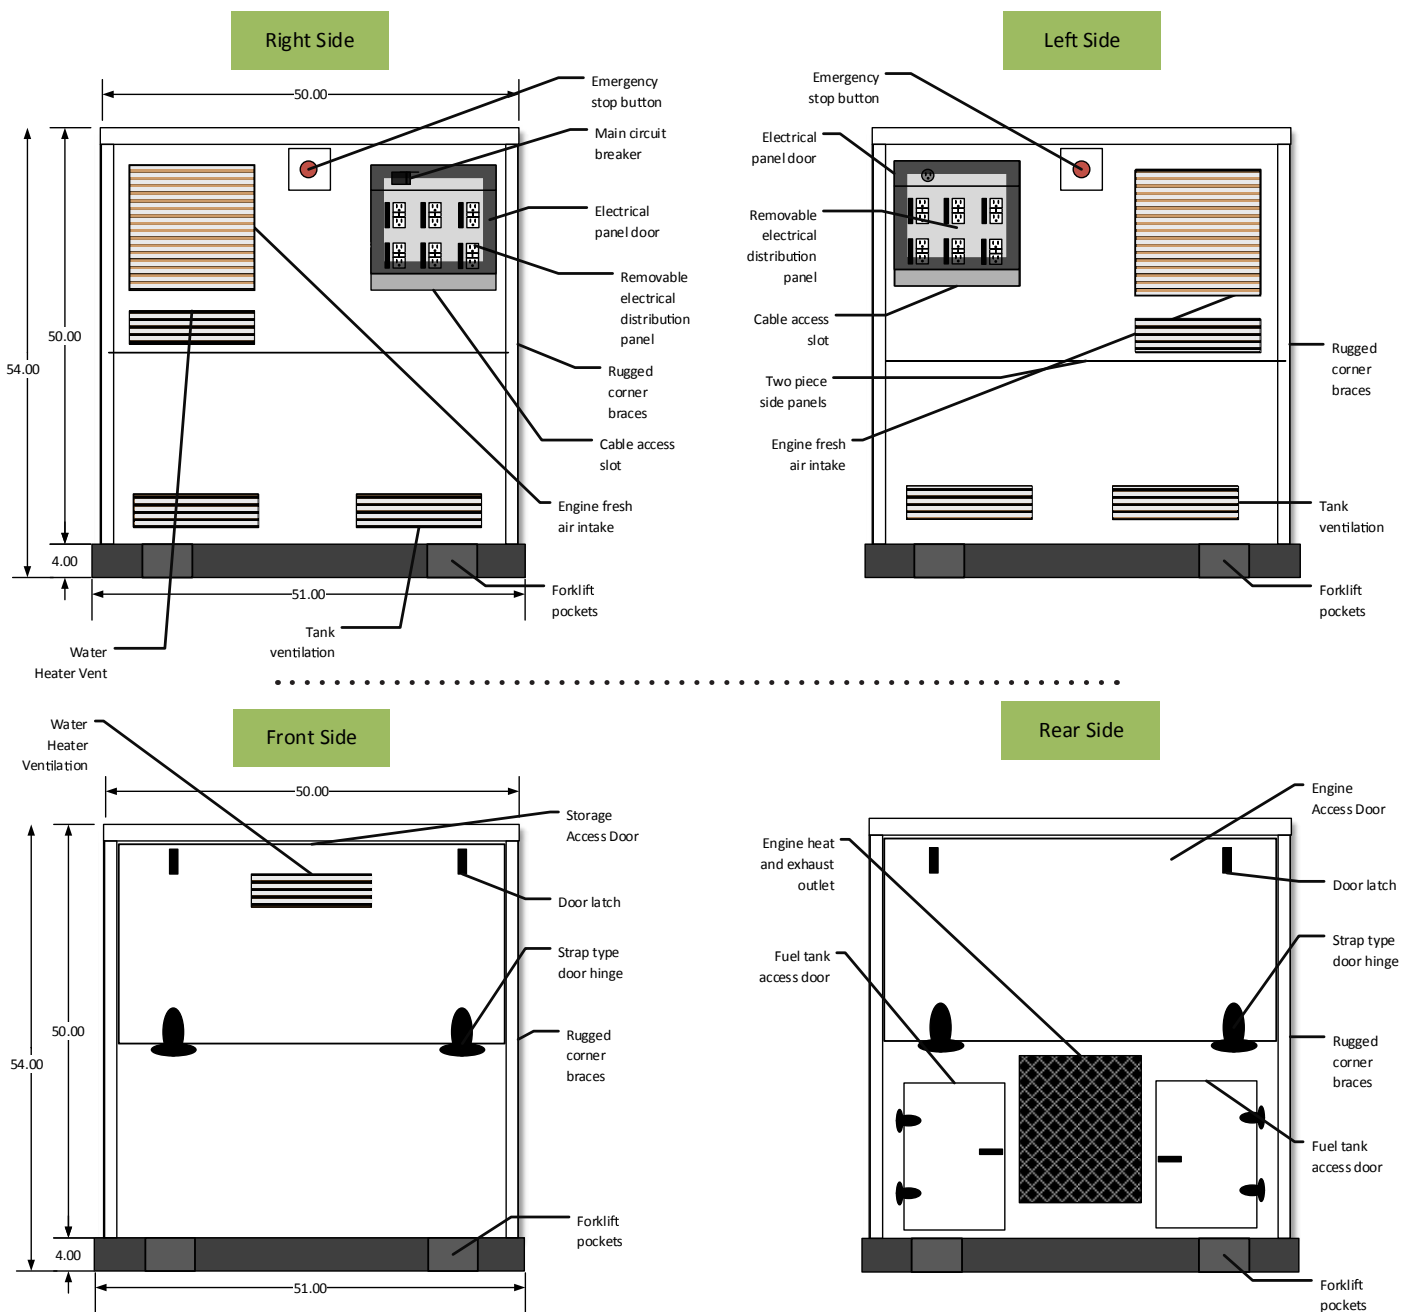

THE FUTURE OF POWER HAS ARRIVED IN COLORADO

Fastlane Productions provides clean,
propane powered generators.

DIMENSIONS:

50"l x 50"w x 54"h
(fork base maximum width 51")
Weight: 1776 dry 2015 fueled.

MULTI FUNCTION ELECTRICAL DISTRIBUTION PANELS

20kW @ 120/208 with various
single/three phase output options
(6) 20A 120V GFCI receptacles,
(3) 30A 120V RV plugs,
(3) L-21-20 three phase plugs,
(2) L-21-30 three phase plugs,
(1) 50A 120/240V twist lock,
or hard wire.

VAPOR GAS AIR-COOLED ENGINE

Reduce the chance of spills and
keep the site more eco-friendly
with reduced emissions.

Engine: 996cc air cooled
Oil Capacity: 2.43 US qts
Sound: 65db @ 21'.

EXTENDED RUN ON BOARD FUEL TANKS

Up to 40 hours of operation
between refuels
Fuel Capacity: 64 US gals LPG.
Fuel Consumption:
1 ghp @ 10% load to 3 gph
@ 100% load.

Demo's available. Generators
available for rental, lease or purchase

FASTLANE

PRODUCTIONS, INC

EQUIPMENT ■ SUPPORT ■ PROFESSIONAL EVENTS

(303)778-0045 fastlaneproductions.com

ON DEMAND HOT WATER

Optional add on: continuous hot
water for cooking, cleaning, and
other uses. Great for emergency
response and food-related events.
Hot Water Output: 1.6 gpm
@ 45F rise.

MODULAR DESIGN

24 generators fit on one 48'
semi truck. Single unit trailer
option available.

EASY PLACEMENT

Place generators on your site using
a forklift or crane making theft
very difficult.

INTEGRATED STORAGE

Ship cable needed for the job with
the generators. No need to ship or
handle separately.

EXTERNAL FUEL TANK CONNECTION

Connect generators to a larger
fuel tank for less frequent refuels.

GAS LEAK DETECTION AND SAFETIES

Emergency stop buttons
and self-monitoring system
keep generators safe if a
vapor gas leak is detected.



THE FUTURE OF PORTABLE POWER REFINED: 4TH GENERATION

GPS tracking
Remote start/stop
Low battery self-charging feature
Improved engine/generator
monitoring system
Enhanced trouble fault reporting
and low fuel warning system
Brushless three phase
output generator
External fuel tank selector switch
Enhanced engine speed
control system
Revised and improved
LPG tank ventilation system

Improved engine/
generator warranty
Oil change intervals have
been extended from 250 hours
to 500 hours
New enclosure with better
ventilation and improved
serviceability features
New screenprinted
graphics scheme
Roof mounted 4 point
lifting tabs (optional)

